

PRODUCT DATA SHEET

Category: wall lamp
 Environment: indoor / outdoor
 Product use: building facades, interior walls, areas with increased humidity such as SPA and Wellness
 Protection class: IP65
 Ambient temperature: - 30 to 60 °C
 Service lifetime: 50 000 hours

We provide post-warranty service and lamps renovation.

Materials: stainless steel, hand-blown glass
 Finish: hand-forged stainless steel, patinated
 Glass: crystal with air bubbles
 Net weight: 3,7 kg
 Lamp temperature: 30 °C
 Power cable: yes
 Accessories: anchoring to masonry, length 20 cm

Input voltage 24 V DC:




Power consumption: 16 W
 Light source: LED module brand CREE
 Color temperature: 3000 K / 4000 K / 6000 K / RGBW
 Dimming: yes, using external controllers
 the principle of low-voltage dimming
 (control and power supply not included)

Input voltage 210 - 240 V AC / 50 - 60 Hz

Power consumption: 9 W
 Light source: LED module brand SEOUL
 Color temperature: 3000 K / 4000 K / 6000 K
 Dimming: no

Certificates: **CE** | UKCA

Family

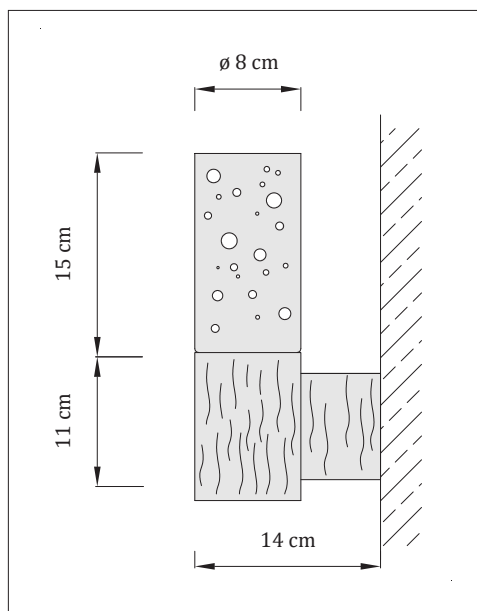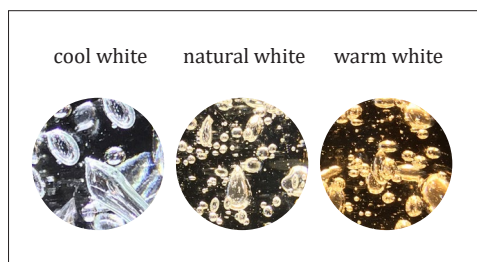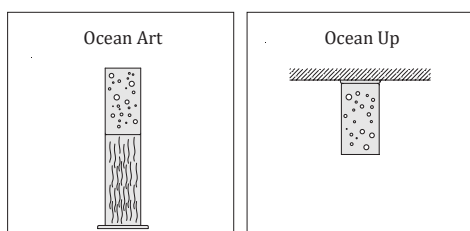

Reference code	Input voltage	Color temperature
OWA-24-WW	24 V DC	3000 K (WW - warm white)
OWA-24-NW	24 V DC	4000 K (NW - natural white)
OWA-24-CW	24 V DC	6000 K (CW - cool white)
OWA-24-RGBW	24 V DC	RGBW
OWA-230-WW	210 - 240 V AC / 50 - 60 Hz	3000 K (WW - warm white)
OWA-230-NW	210 - 240 V AC / 50 - 60 Hz	4000 K (NW - natural white)
OWA-230-CW	210 - 240 V AC / 50 - 60 Hz	6000 K (CW - cool white)